



Demand more. Choose Foster

EcoPro G2 600 Litre Upright Freezer Cabinet

EP700L




Temperature

 Freezer -18/-21 °C

Dimensions (mm)

W 700 D 820
H 2080



Capacity

600 Litres

Weight

Unpacked: 121 KG Packed: 133 KG

Features & Benefits

We've revolutionised professional refrigeration... again. Built from the ground up to include over 50 new features and innovations, the EcoPro G2 is loaded with new design, quality, reliability efficiency and performance features.

- All new thicker and more robust cabinet design with advanced thermal efficiency and market leading capacity making your money go further
- New 'smartphone style' touch sensitive hidden-until-lit control panel with unique high visibility temperature display combines sophistication with functionality
- All-new ergonomic door and handle design for ease of opening and cleaning
- Designed using high technology: 'Fluid Food-Fresh Dynamics' modelling, the new and improved advanced Foster Circularair II air distribution system maximises efficient operation even when shelves are fully loaded
- Brand-new refrigeration system designed to be the most technologically advanced and energy efficient yet

| External Finish | |
|--|----------|
| 304 Stainless Steel | Option |
| Stainless Steel | Standard |
| 304 Stainless Steel Rear For Island Siting | Option |

| Internal Finish | |
|---------------------|----------|
| 304 Stainless Steel | Option |
| Aluminium | Standard |

| Shelving | |
|------------------|----------------------|
| GN 2/1 Shelf | Quantity: 3 Standard |
| Additional Shelf | Option |

| Base Fittings | |
|---------------|----------|
| 80mm Castors | Standard |
| 150mm Legs | Option |

| Doors | |
|---------------------|----------|
| Solid Full | Standard |
| Solid Half | Option |
| Hinged - Right Hand | Standard |
| Hinged - Left Hand | Option |


| Refrigeration | |
|--------------------|----------|
| Forced Air | Standard |
| Integral | Standard |
| R290 (Hydrocarbon) | Standard |
| R404a | Option |
| Drain Required? | No |

| Electrical, Energy and Service Information | |
|--|----------|
| 230 Volts | Standard |
| 50Hz | Standard |
| 60Hz | Option |
| 1 Phase | Standard |
| Running Watts | 1021 |
| Running Amps | 4.2 |
| Thermal Heat Rejection (W) | 1,031 |
| Noise (dBa @ 1m) | 64.1 |
| Fuse Required (A) | 10 amp |
| Refrigerant charge | 0.12 |
| Global Warming Potential | 3 |
| Energy Efficiency Index | 43.24 |

Footnotes

- Marine kit option includes legs, bulkhead brackets & marine shelves.
- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm.
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet.

Energy Performance Data and information

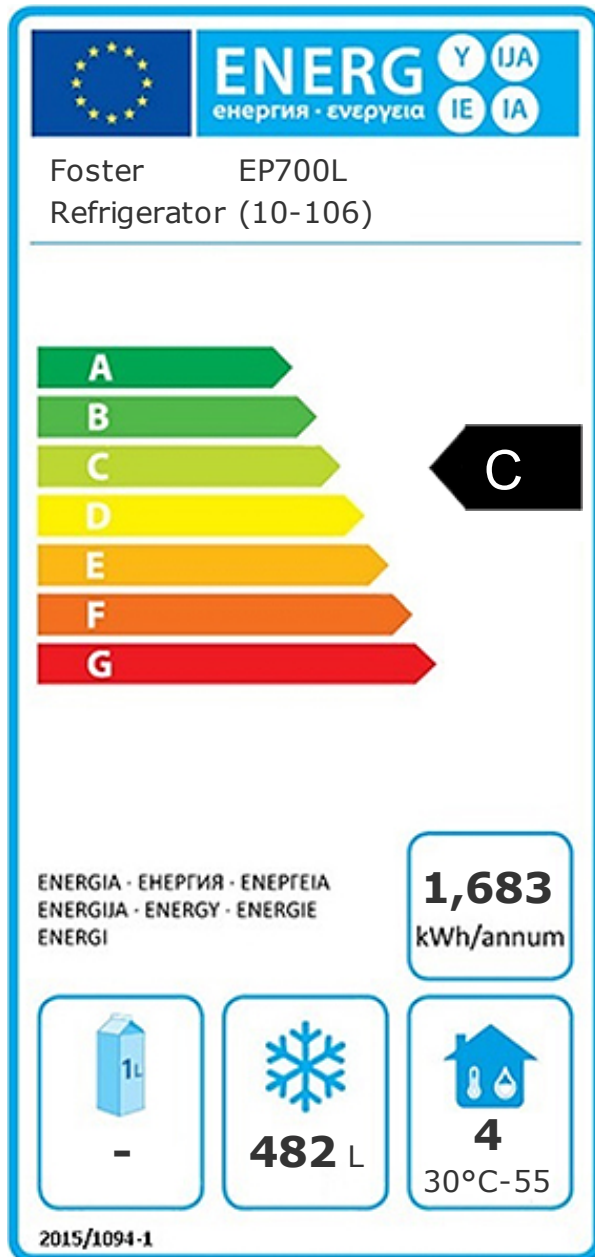

Application

This appliance is intended for use in ambient temperatures up to 40²¹°C

Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit www.fosterrefrigerator.co.uk/Foster-OurPolicies.asp