



Demand more. Choose Foster

Slimline 400 Litre Upright Freezer Cabinet

FSL400L



Temperature



Freezer -18/-21 °C

Dimensions (mm)

W 600 D 705

H 1900



Capacity

400 Litres

Weight

Unpacked: 99 KG Packed: 112 KG

Features & Benefits

The Slimline range's footprint is ideal for outlets where space is an issue. Slimline cabinets are ideal for smaller, independent catering outlets looking for value for money and quality refrigeration.

- Bottom mounted system draws air from the cooler part of the kitchen ensuring lower running costs
- Forced air refrigeration for efficient operation, even temperature distribution and fast recovery
- Automatic Defrost for hassle-free operation
- Electronic temperature display for accurate control
- Delivers the reliability and performance you would expect from a Foster at a highly competitive price

| External Finish | |
|----------------------|----------|
| Stainless Steel Door | Standard |
| Stainless Steel | Standard |

| Internal Finish | |
|-----------------|----------|
| Aluminium | Standard |

| Shelving | |
|--------------------|----------------------|
| Nylon Coated Shelf | Quantity: 3 Standard |

| Base Fittings | |
|---------------|----------|
| 80mm Castors | Standard |

| Doors | |
|---------------------|----------|
| Solid Full | Standard |
| Hinged - Right Hand | Standard |
| Hinged - Left Hand | Option |
| Glass | Option |


| Refrigeration | |
|--------------------|----------|
| Forced Air | Standard |
| Integral | Standard |
| R290 (Hydrocarbon) | Option |
| R404a | Standard |
| Drain Required? | No |

| Electrical, Energy and Service Information | |
|--|----------|
| 230 Volts | Standard |
| 50Hz | Standard |
| 1 Phase | Standard |
| Running Watts | 642 |
| Running Amps | 4.2 |
| Thermal Heat Rejection (W) | 680 |
| Noise (dBa @ 1m) | 67.9 |
| Fuse Required (A) | 10 amp |
| Refrigerant charge | 0.285 |
| Global Warming Potential | 3922 |
| Energy Efficiency Index | 113.81 |

Footnotes

- Decibel rating measured 1m high from the floor and 1m from the cabinet

Energy Performance Data and information

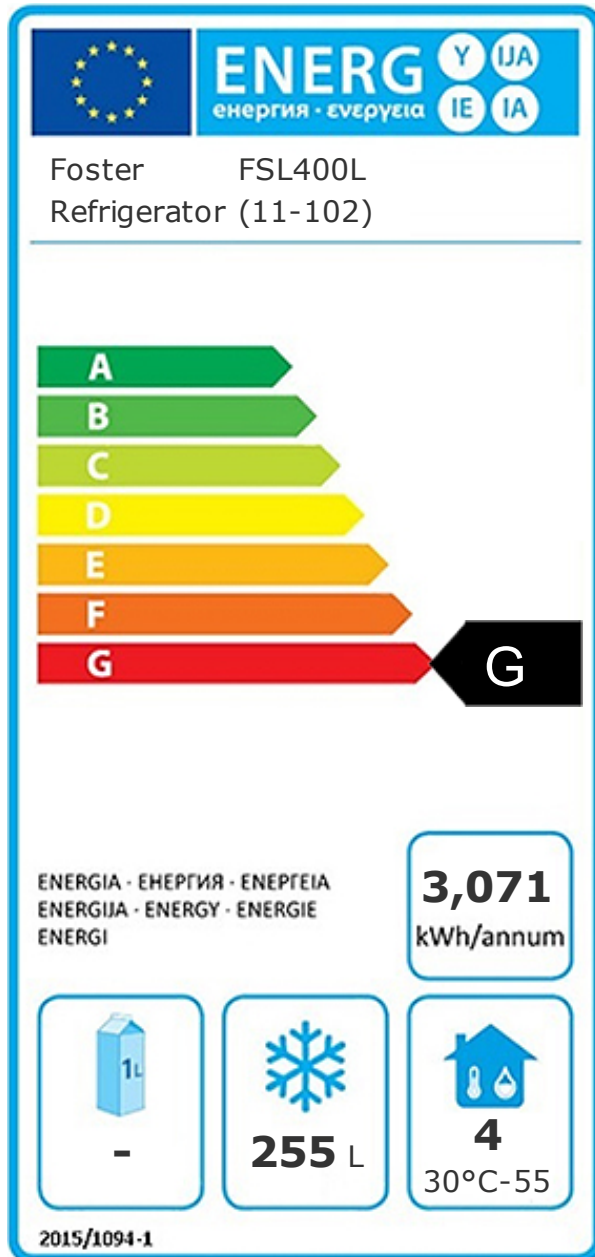

Application

This appliance is intended for use in ambient temperatures up to 40²⁷/₁C

Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit www.fosterrefrigerator.co.uk/Foster-OurPolicies.asp