

# Counter Refrigeration

## Features

- Bottom mounted compressor units
- Stainless steel interior and exterior construction
- Hydrocarbon Gas – R600
- Self-closing and stay open door
- Rounded interior corner design
- Recessed door handle
- Magnetic door gaskets
- 1x shelf + 1x base shelf per door
- Easy access for service
- Castors as standard



ICE3801GR



ICE3820GR



ICE3851GR

Counters

Product Code	
ICE3801GR	2 Door Counter
ICE3820GR	4 Drawer Counter
ICE3851GR	3 Door Counter

## Optional Extras



Description
Extra shelf and Runners




## Counter Refrigeration

ICE3801GR

ICE3820GR (with 4 drawers)

ICE3851GR

Counters

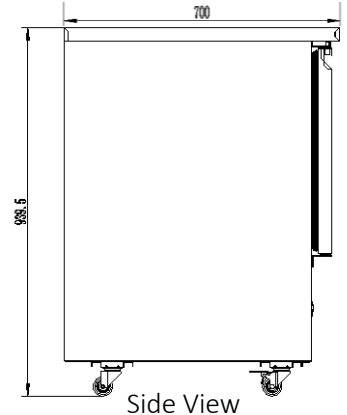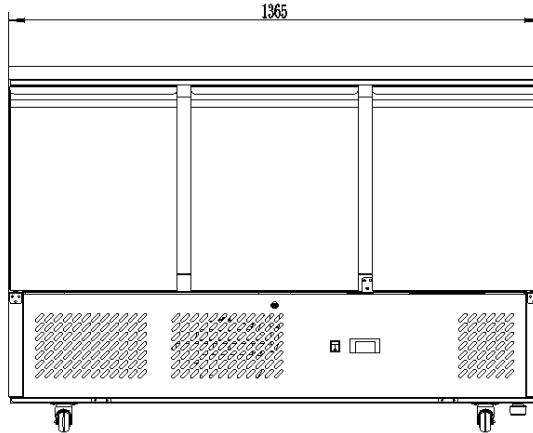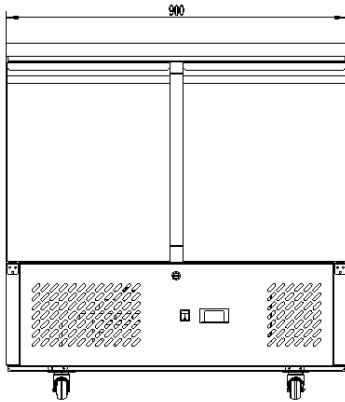

Classification	ICE3801GR	ICE3820GR	ICE3851GR
Exterior Dimension (WxDxH mm)	900 x 700 x 939	900 x 700 x 939	1365 x 700 x 939
Interior Dimension (WxDxH mm)	830 x 595 x 510	830 x 595 x 510	1295 x 595 x 510
Packing Dimension (WxDxH mm)	955 x 754 x 1050	955 x 754 x 1060	1410 x 750 x 1060
Shelf Dimension (WxDxH mm)	340 x 590	N/A	340 x 590
Shelf Quantity	4	N/A	6
Loading Capacity Per Shelf (kg/pcs)	18	N/A	18
Capacity (Litre)	300	300	380
Net Weight (kg)	72	82	94
Gross Weight (kg)	92	102	124
Voltage (V/Hz/Ph)	220/50/1	220/50/1	220/50/1
Power (W)	220	220	220
Electric Current (A)	1.2	1.2	1.2
Power Consumption (kw/24h)	1.16	1.45	1.6
Defrost Method	Air Defrost	Air Defrost	Air Defrost
Climatic Class	4	4	4
Refrigerant Amount (g)	60g	60g	70g
Refrigerant	R600a	R600a	R600a
Cooling Method	Fan Assisted	Fan Assisted	Fan Assisted
Inner Temperature (°C)	-2°C to +8°C	-2°C to +8°C	-2°C to +8°C
Insulation Thickness (mm)	35	35	35
Foaming Material	C5H10	C5H10	C5H10
Castors	4 (2 Braked on front)	(2 Braked on front)	4 (2 Braked on front)
Stainless Steel Interior and Exterior	201	201	201

