

# C Range | pass through




**C1011**  
(shown with tabling –  
not included)



**C1035 WS**  
(shown with tabling –  
not included)

- 2 year warranty
- Breaktank on both C1011 & C1035 WS
- C1035 WS with internal automatic water softener
- Bright LED display with soft touch controls
- Accurate detergent and rinse aid peristaltic dosing as standard
- Drain pump fitted as standard on C1035 WS
- Drain pump optional on C1011
- Patented DUAL flow wash pump, reduced power while retaining wash efficiency
- Three selectable cycle options plus special application cycles options
- Cycle times can be tailored to site requirements
- Selectable energy saving mode
- Selectable thermostat ensures optimum rinse temperatures
- Automatic self-cleaning cycle at end of service
- Surface scrap tray filters on 500mm rack models
- Operational self-diagnostics
- Twin traffic light display indicates machine status
- Supplied with one pegged plate, one open rack and cutlery basket

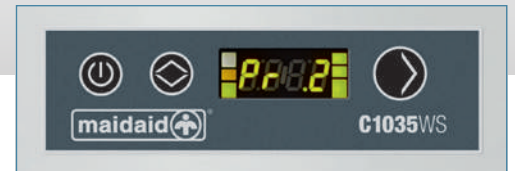

## Technical

- Standard voltage 240V – single phase
- Both models can be supplied for 3 phase
- Suitable for hot (max 50°C) or cold\* water supply at 2 to 4 bar dynamic supply pressure
- Wash temperature 60°C (adjustable)
- Rinse temperature 78°C (adjustable)
- Cycle times between 70 & 240 secs

Drain pump versions require a waste up-stand for correct operation.

Restrictive waste connections should be avoided for all installations.

\*Machines fitted to cold water supplies will not be capable of running repeated short cycles, the cycle time will automatically be extended to allow recovery of correct operating temperatures.

Model	Rack size mm	Useable Height mm	Dimensions mm W x D x H	Cycle Options	Power kW	Amps Required	Price
<b>C1011</b>	500	380	640 x 740 x 1450 <sup>#</sup>	3 Cycles	6.5/4.5	20/30 <sup>##</sup>	<b>£4,760</b>
<b>C1011D</b>			As C1011 above with fitted drain pump				<b>£4,990</b>
<b>C1035 WS</b>	500	380	640 x 740 x 1450 <sup>#</sup>	3 Cycles	6.5/4.5	20/30 <sup>##</sup>	<b>£5,170</b>

# Height adjustable from 1450 to 1510mm (hood closed), 1885 to 1940mm (hood open). Heights include adjustable legs.


## Machines will be supplied for 30 amp supply as standard, if 20 amp required specify at time of order.

It is strongly recommended that 500mm machines are installed on hot water fill (max 50°C) for optimum performance.

# C Range | pass through + heat recovery



dishwashers



**C1035 WS HR**  
(shown with tabling – not included)

- 2 year warranty
- **HEAT RECOVERY**
- **Up to 25% less power required to heat rinse water**
- **HR module supplied separately with simple bolt on instructions**
- Reduces need for extraction hood and improves working environment
- Breaktank type AA
- Internal automatic water softener
- Bright LED display with soft touch controls
- Accurate detergent and rinse aid peristaltic dosing as standard
- Drain pump fitted as standard
- Patented DUAL flow wash pump, reduced power while retaining wash efficiency
- Three selectable cycle options plus special application cycles options
- Cycle times can be tailored to site requirements
- Selectable energy saving mode
- Selectable thermostop ensures optimum rinse temperatures
- Automatic self-cleaning cycle at end of service
- Surface scrap tray filters
- Operational self-diagnostics
- Twin traffic light display indicates machine status
- Supplied with one pegged plate, one open rack and cutlery basket

## Technical

- Standard voltage 240V – single phase (can be supplied for 3 phase)
- Suitable for cold\* water supply only at 2 to 4 bar dynamic supply pressure. Cannot be used with hot water supply.
- Wash temperature 60°C (adjustable)
- Rinse temperature 78°C (adjustable)
- Cycle times between 70 & 240 secs

Drain pump versions require a waste up-stand for correct operation.

Restrictive waste connections should be avoided for all installations.

\*Machines fitted to cold water supplies will not be capable of running repeated short cycles, the cycle time will automatically be extended to allow recovery of correct operating temperatures.



Model	Rack size mm	Useable Height mm	Dimensions mm W x D x H	Cycle Options	Power kW	Amps Required	Price
<b>C1035 WS HR</b>	500	380	640 x 740 x 2150#	3 Cycles	6.5/4.5	20/30##	<b>£7,900</b>

# Height adjustable from 2150 to 2205mm.

## Machines will be supplied for 30 amp supply as standard, if 20 amp required specify at time of order.

See page 10 for ancillary items.



# C, D & Evolution | tabling

Stainless steel scrap bin c/w castors and lid

**704002** **£370**

Closed end table c/w undershelf. 700mm long, 615mm deep

**717000** **£380**

Closed end table c/w splashback and undershelf. 700mm long. (Right hand as illustrated)

**80201** (Left hand) **£495**  
**80200** (Right hand) **£495**

Closed end table c/w splashback and undershelf. 1200mm long. (Right hand as illustrated)

**80203** (Left hand) **£685**  
**80204** (Right hand) **£685**

Closed end table c/w splashback, undershelf and sink. 1200mm long. (Right hand as illustrated)

**80205** (Left hand) **£1,095**  
**80206** (Right hand) **£1,095**

Closed end table c/w splashback, short undershelf, sink and scrap hole. 1200mm long supplied with rubber scrap hole protection ring. (Right hand as illustrated)

**80207** (Left hand) **£1,170**  
**80208** (Right hand) **£1,170**

- All tabling is suitable for 500 x 500mm racks
- Supplied flat packed for easy assembly
- Available left or right hand arrangement – must be specified
- All legs supplied with height adjustable feet
- Tables including sinks have single ¾" hole for **monoblock** spray arm and 1½" waste
- All sinks are 500mm wide x 400mm front to back x 250mm deep
- All tables with splashback are 745mm deep

Item	Description	Part No.	Price
<b>Pre-wash Spray Arms</b>	Pre-wash spray arm: <b>Monoblock</b> spray arm – hot & cold	<b>Z600100</b>	<b>£370</b>
	Pre-wash spray arm: <b>Monoblock</b> spray arm – hot & cold with stem tap	<b>Z600105</b>	<b>£485</b>
	Pre-wash spray arm: <b>Twin pillar</b> spray arm – hot & cold	<b>Z600200</b>	<b>£405</b>
	Pre-wash spray arm: <b>Twin pillar</b> spray arm – hot & cold with stem tap	<b>Z600205</b>	<b>£495</b>

Pre-wash spray arm: **Monoblock** spray arm – hot & cold water feed with stem tap

**Z600105**  
**£485**

Pre-wash spray arm: **Twin pillar** spray arm – hot & cold water feed with stem tap

**Z600205**  
**£495**