



## GS7 - Lincat Silverlink 600 Electric Counter-top Griddle - Steel Plate - W 750 mm - 6.0 kW

Whether you're cooking eggs, bacon, burgers or vegetables, the versatile Silverlink 600 Electric Griddle won't let you down.

- ✓ Two separately controlled heat zones give you the option of operating either zone independently to provide a smaller cooking area during quiet periods as well as offering versatility when cooking two separate meals simultaneously
- ✓ 12 mm thick machined steel plate providing even heat distribution and an easy to clean surface
- ✓ The plate is fully welded into the frame to prevent leaks and places where food and carbon can build up
- ✓ 2 cooking zone to give maximum flexibility during service
- ✓ Thermostatically controlled to give accurate temperatures during the cooking process for consistent results
- ✓ Front mounted control for easy of use during cooking

### Specifications

#### Summary

<b>Brand</b>	Lincat
<b>Range</b>	Silverlink 600
<b>Power Type</b>	Electric
<b>Unit Type</b>	Counter-top
<b>Available in UK Only</b>	No
<b>UK Warranty</b>	2 Years Parts and Labour Warranty
<b>Export Warranty</b>	Contact your local dealer
<b>GTIN</b>	5056105104896

#### Power and Performance

<b>Total Power kW</b>	6.0
<b>Temperature Range °C</b>	50-250
<b>IP Rating</b>	IP23
<b>Cooking Area (Width x Depth) mm</b>	712 x 405
<b>Temperature Control</b>	Mechanical

#### Key Specifications

<b>Number of Heat Zones</b>	2
<b>Grill Plate Surface Type</b>	Smooth
<b>Grill Plate Material</b>	Steel

#### Capacity

<b>Product Output per Hour</b>	190 x 115g [4oz] burgers [frozen], 140 x 225g [8oz]
--------------------------------	---

#### Weights and Dimensions

<b>Unit Height (External) mm</b>	330
<b>Unit Width (External) mm</b>	750
<b>Unit Depth (External) mm</b>	620
<b>Net Weight Kg</b>	48.9

#### Supply Connections

<b>Requires Installation</b>	Yes
<b>Requires Electrical Supply</b>	Yes
<b>UK 3 Pin Plug</b>	No
<b>Requires Hardwiring</b>	Yes
<b>Electrical Supply Rating Watts</b>	6,000
<b>Single Phase Amps</b>	26.1
<b>Single Phase Voltage</b>	230
<b>Three Phase Amps</b>	L1=13.0; L2=13.0; L3=N/A
<b>Three Phase Voltage</b>	400

#### Shipping

<b>Packed Weight Kg</b>	68.6
<b>Packed Height cm</b>	63.5
<b>Packed Width cm</b>	85.5
<b>Packed Depth cm</b>	70




### Available Accessories

<b>CC7</b>	Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal with Doors - W 750 mm
------------	---

## Available Accessories

<b>CN7</b>	Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal without Doors - W 750 mm
<b>HC7</b>	Lincat Silverlink 600 Free-standing Heated Open-Top Pedestal with Doors - W 750 mm - 0.5 kW
<b>HCL7</b>	Lincat Silverlink 600 Free-standing Heated Pedestal with Legs and Doors - W 750 mm - 0.75 kW
<b>SB7</b>	750 GRIDDLE SPLASHB
<b>SLS7</b>	Lincat Silverlink 600 Free-standing Floor Stand - for units W 750 mm

## Technical Picture

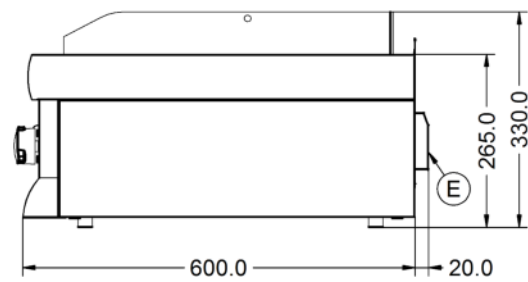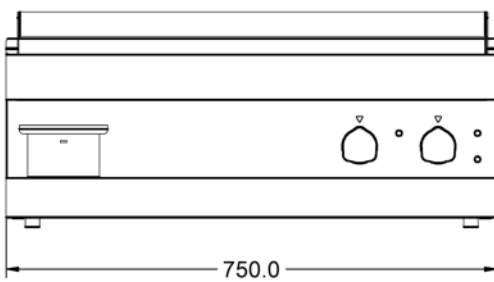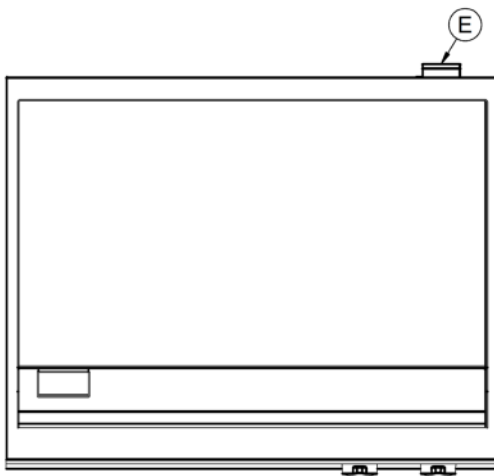



#### Lincat Limited

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



#### Customer Care

**Tel:** +44 1522 875500  
**Email:** [care@lincat.co.uk](mailto:care@lincat.co.uk)

#### Export Customers

**Tel:** +44 1522 875536  
**Email:** [export@lincat.co.uk](mailto:export@lincat.co.uk)

#### Opening Hours

**Monday – Friday:**  
8.30am – 5pm