



P0630 - Lincat Electric Counter-top Pizza Oven - Single-Deck - W 1286 mm - 7.2 kW

Transport yourself to the Centro Storico district of Naples with the authentic taste of the pizzas from the Lincat Electric Pizza Oven.

- ✓ Ideal for restaurants, pizzerias, takeaways, fast food outlets, canteens and leisure establishments
- ✓ Perfect for deep pan, thin crust, fresh dough, part baked or frozen pizzas, as well as a variety of other foods such as ciabatta, naan, garlic bread, lasagna, jacket potatoes, pies, pasties and pastries
- ✓ Firebrick base for crisp, even cooking of pizza bases and a maximum temperature of 480°C
- ✓ Internal illumination for better visibility of product and enhanced appearance in front of house applications
- ✓ Independently controlled top and base of oven compartment
- ✓ Thermostatic control and temperature display gauge to monitor oven temperature more accurately
- ✓ Double-glazed door construction for energy efficiency with toughened glass for safety
- ✓ 20 minute audible timer

Specifications

Summary Power and Performance

| | | | |
|-----------------------------|-----------------------------------|-----------------------------|------------|
| Brand | Lincat | Total Power kW | 7.2 |
| Range | Specialist | Temperature Range °C | 80-480 |
| Power Type | Electric | IP Rating | IP23 |
| Unit Type | Counter-top | Temperature Control | Mechanical |
| Available in UK Only | No | Oven Rating kW | 7.2 |
| UK Warranty | 2 Years Parts and Labour Warranty | | |
| Export Warranty | Contact your local dealer | | |
| GTIN | 5056105103721 | | |

Key Specifications Capacity

| | | | |
|------------------------|---|-----------------------|--------------------------------|
| Number of Decks | 1 | Pizza Capacity | 6 x 12" [30cm] pizzas per deck |
|------------------------|---|-----------------------|--------------------------------|

Weights and Dimensions Supply Connections

| | | | |
|----------------------------------|-------|---------------------------------------|---------------------------|
| Unit Height (External) mm | 365 | Requires Installation | Yes |
| Unit Width (External) mm | 1286 | Requires Electrical Supply | Yes |
| Unit Depth (External) mm | 925 | UK 3 Pin Plug | No |
| Height (Internal) mm | 160 | Requires Hardwiring | Yes |
| Width (Internal) mm | 950 | Electrical Supply Rating Watts | 7,200 |
| Depth (Internal) mm | 640 | Single Phase Amps | 31.3 |
| Net Weight Kg | 129.5 | Single Phase Voltage | 230 |
| | | Three Phase Amps | L1=10.4; L2=10.4; L3=10.4 |
| | | Three Phase Voltage | 400 |

Shipping

| | |
|-------------------------|-------|
| Packed Weight Kg | 133.5 |
| Packed Height cm | 58 |
| Packed Width cm | 139 |
| Packed Depth cm | 111 |

Available Accessories




PO630/FS Floor Stand for P0630

Available Accessories

P0630/SK

Stacking Kit for P0630

Technical Picture

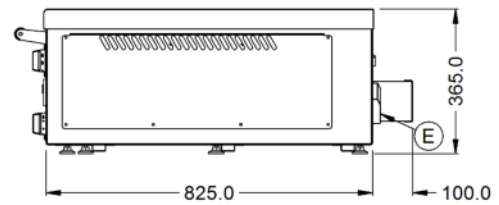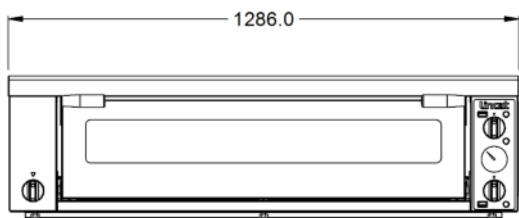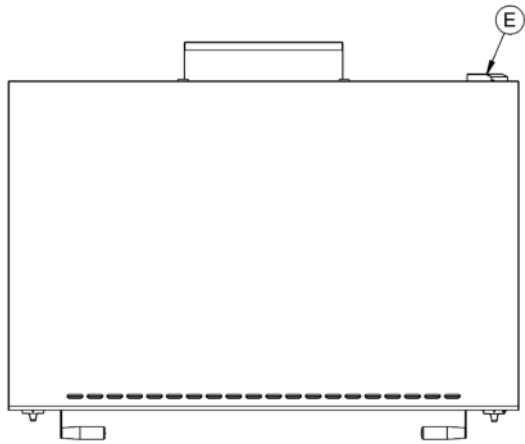



Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm