

# Preparation Units

Preparation Units



**ICE3832GR**

5 x 1/6 GN Pans Included



**ICE3853GR**

7 x 1/6 GN Pans Included

**ICE3869GR**

7 x 1/3 GN Pans Included

## Features

- Stainless steel retractable lid covering GN pans
- Bottom mounted compressor units
- Stainless steel interior and exterior construction
- Self-closing and stay open door
- Rounded interior corner design
- Recessed door handle
- Magnetic door gaskets
- 1x shelf + 1x base shelf per door
- Easy access for service
- Castors as standard

Product Code	
ICE3832GR	2 Door Preparation Unit 5 x 1/6 GN Pans
ICE3853GR	3 Door Preparation Unit 7 x 1/6 GN Pans
ICE3869GR	3 Door Preparation Unit 7 x 1/3 GN Pans

## Optional Extras






Description
Extra shelf and Runners

## Preparation Units

ICE3832GR

ICE3853GR, ICE3869GR

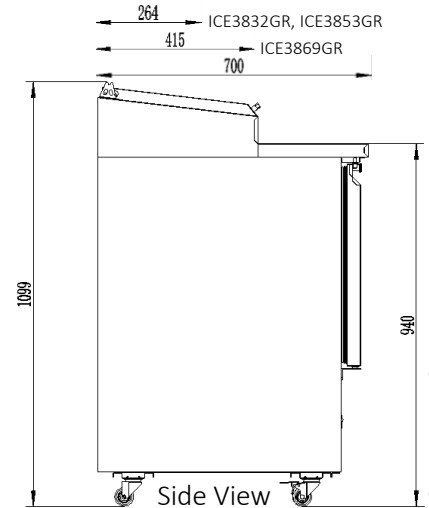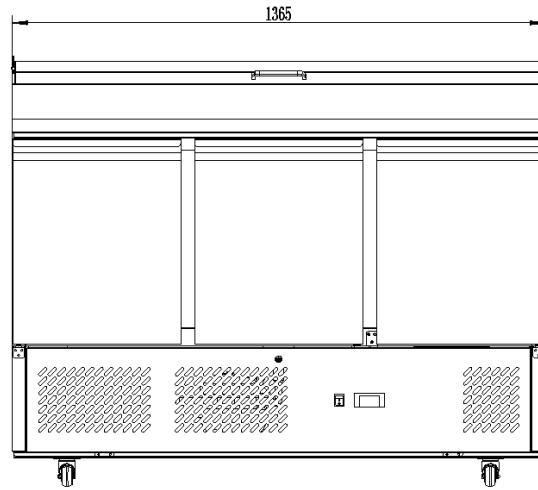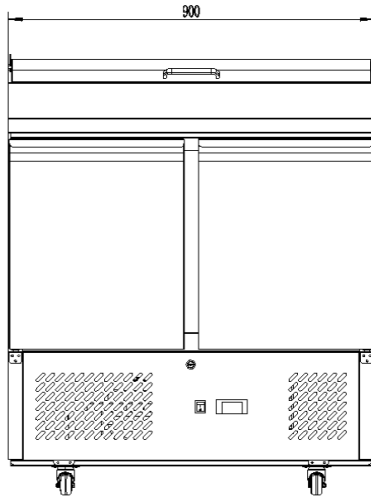

Preparation Units

Classification	ICE3832GR	ICE3853GR	ICE3869GR
Exterior Dimension (WxDxH mm)	900 x 700 x 1099	1365 x 700 x 1099	1365 x 700 x 1099
Interior Dimension (WxDxH mm)	830 x 595 x 510	1295 x 595 x 510	1295 x 595 x 510
Packing Dimension (WxDxH mm)	945 x 750 x 1260	1410 x 750 x 1260	1410 x 750 x 1260
Shelf Dimension (WxDxH mm)	340 x 590	340 x 590	340 x 590
Useable Working Area (mm)	900 x 436	1365 x 590	1365 x 285
Shelf Quantity	4	6	6
Loading Capacity Per Shelf (kg/pcs)	18	18	18
Capacity (Litre)	300	380	380
Net Weight (kg)	77	108	103
Gross Weight (kg)	95	149	142
Voltage (V/Hz/Ph)	220/50/1	220/50/1	220/50/1
Power (W)	310	310	310
Electric Current (A)	2	2	2
Power Consumption (kw/24h)	2.12	2.55	2.55
Defrost Method	Air Defrost	Air Defrost	Air Defrost
Climatic Class	4	4	4
Refrigerant Amount (g)	60g	70g	70g
Refrigerant	R600a	R600a	R600a
Cooling Method	Fan Assisted	Fan Assisted	Fan Assisted
Inner Temperature (°C)	-2°C to +8°C	-2°C to +8°C	-2°C to +8°C
Insulation Thickness (mm)	35	35	35
Foaming Material	C5H10	C5H10	C5H10
Castors	4 (2 Braked on front)	4 (2 Braked on front)	(2 Braked on front)
Stainless Steel Interior and Exterior	201	201	201

