




G3122 GAS BOILING TOP

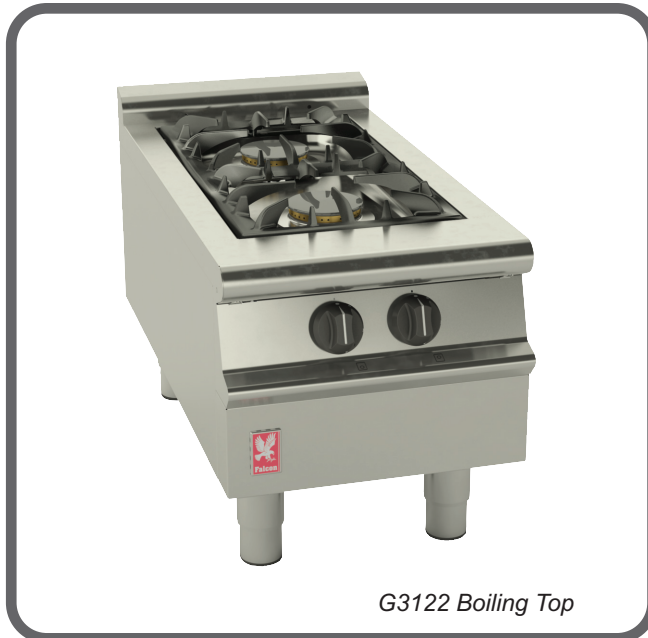

G3122 Boiling Top

KEY FEATURES

- Energy efficient, high performance 5.3kW burners
- *quick heat up, reduced waiting time*
- Semi-sealed, pressed stainless steel hob
- *easy to remove and keep clean*
- Cast iron pan support
- *long-lasting and robust*
- Mounted upon legs
- *can be installed upon any suitable surface*
- Optional stands available
- *fixed or mobile*
- Laser-etched control icons
- *permanent, indelible markings*

MODELS and ACCESSORIES

G3122 Two burner boiling top

- Fully integrated extended flue
- Splashplate and plateshelf (*not for use with extended flue*)
- Fixed stand
- Mobile stand
- Lift-off fryplate
- Fixed installation kit
- Suiting kit

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. A clearance of 150mm should be observed between appliance and any combustible wall. Please consult the appliance installation manual for further details.






DOMINATOR^{PLUS}

G3122 GAS BOILING TOP

MODEL DIMENSIONS (in mm)

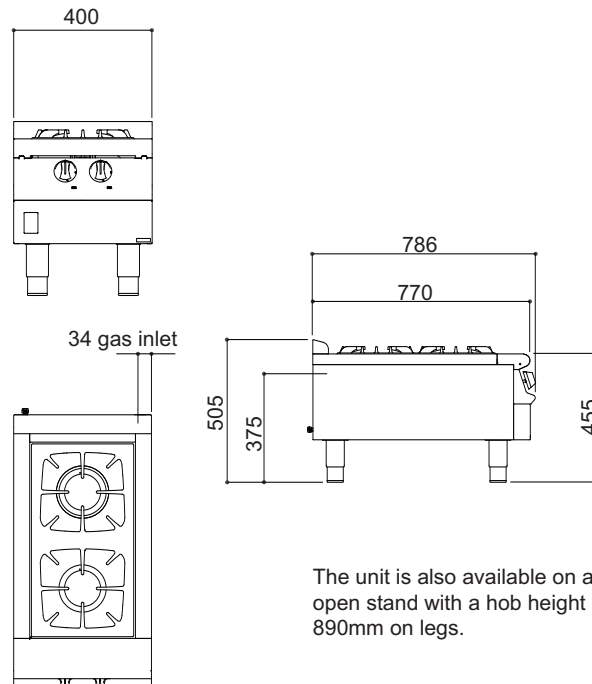

The unit is also available on an open stand with a hob height of 890mm on legs.

SPECIFICATION DETAILS

	G3122
Total rating (natural and propane - kW - Nett)	10.6
Total rating (natural and propane - btu/hr - gross)	39,800
Inlet size (natural and propane)	3/4" BSP
Flow rate - Natural gas (m ³ /hr)	0.82
Flow rate - Propane gas (kg/hr)	1.11
Inlet pressure (natural and propane - mbar)	20 / 37
Operating pressure (natural and propane - mbar)	15 / 37
Hob burner rating (natural and propane - kW)	5.3 x 2
Hob burner rating (natural and propane - btu/hr)	19,900 x 2
Weight (kg)	28.5
Packed weight (kg)	32